

product code

CE-VER30-W


name

Verve 30, Trio CCT, TRIAC, IP44, White

description

Verve 30, White

technical data sheet

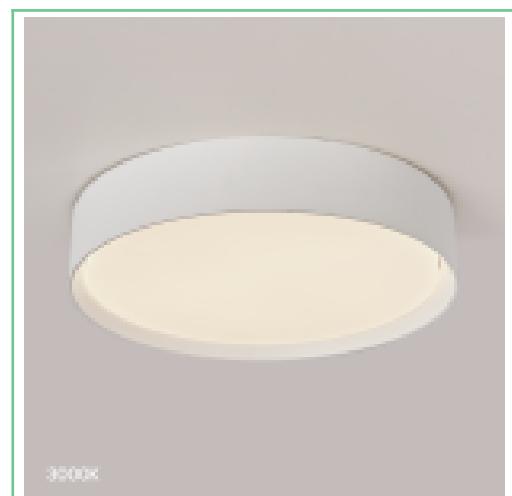

item

| | | | |
|---------------------------|-------------------------|-------------------------------|---------|
| finish | Sand white | bathroom zones | N/A |
| main material | Aluminium / PC Diffuser | tilt angle | N/A |
| overall dimensions | Dia. 301mm x 58mm | adjustable | N/A |
| application | Ceiling / Suspended | warranty | 5 years |
| cut out | N/A | avg hours of operation | 50,000 |
| recess depth | N/A | weight rating | N/A |
| fire rated | N/A | nett weight | N/A |
| ip rating | IP44 | | |

light

| | |
|---------------------------------|--|
| light source | Integrated LED |
| lumen output | 1450 lumens at 3000K, 1750 lumens at 4000K, 1650 lumens at 5700K |
| colour temperature (cct) | 3000K / 4000K / 5700K |
| cri | >80 |
| beam angle | N/A |
| efficacy (lm/w) | N/A |
| lamp detail | SMD LED |
| lamp included? | N/A |

electrical

| | |
|-------------------------|-------|
| maximum wattage | 16 |
| input power | N/A |
| driver included? | N/A |
| power factor | 0.9 |
| switch | N/A |
| dimmable | Yes |
| dimming method | Mains |
| class | 2 |
| cable length | N/A |

additional information

Rear or side cable entry
 CCT switch on back of fitting
 Add PA-VER to suspend from 200mm up to 2m, n.b. IP20
 IES/LDT files supplied for 4000K

project

collection

technical drawings

