



EMLED3NM


SPECIFICATION SHEET

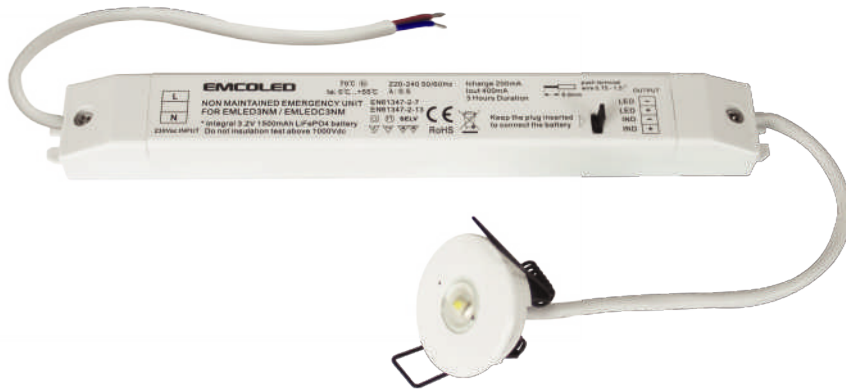



HEAD IP44



Standard
EMLED3NM



Corridor
EMLEDC3NM

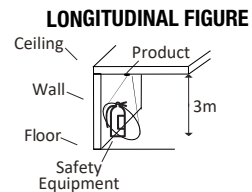

45° Wall Wash
EMLEDW3NM

DESCRIPTION

- 3W LED IP20 Emergency downlight (non-maintained)
- AC230V $\pm$ 5% 50Hz
- 4000K - 4500K
- 180lm, 60lm/W (producing 5 lux @3m)
- **EMLED3NM** : 140° beam angle
- Unobtrusive green charging LED indicator
- Push and lock connector for easy installation
- Designed to BS EN60598-2-22
- 400mA Running current
- 3.2V 1500mAh LiFePO4 batteries
- 0°C to 50°C Working temperature
- Black Finish available upon request
- 2 year battery guarantee
- 3 Year guarantee

CLASSIFICATION

CE **IP 20** RoHS

DIMENSIONS/DRAWING

Downlight Dimensions
Diameter $\varnothing$ 37mm

Control Gear Dimensions
Cutout $\varnothing$ 32mm

FINISH

MATT
WHITE

BLACK

Emco House, Units 6-10, Marshgate Drive
Hertford, Hertfordshire, SG13 7JY, UK

Subject to change without prior notice. E & OE.

sales5@emcogroup.co.uk
www.emcogroup.co.uk

Tel: 01992 582033
Fax: 01992 582044

emcogroup
LIMITED

emcolite

emcosafe

emcovent

EMCOLED

FIREBLOK

rio