



## Diegor - WL3103

### 3W DC24V Constant Voltage Trimless Step Light

#### Description


Step Light for indoor use; Contemporary minimal glare free. Suitable for step-washing and general orientation lighting. • DC24V Constant Voltage;

#### Finish

White

#### Material

Aluminium



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: Osram 3030 Chip

##### GEAR available

on/off,

Output (W):DC24V 3W

Mains dim,

Total power consumption (W): 3W

DALI,

Color temperature:2700K/3000K

Casambi (blue-tooth control of each fixture),

CRI: 93

Photobiological risk: RG1

on/off,

Real Lumen: 180

Mains dim,

Lm/Real W: 60

DALI,


Life Time: 50.000h L90B20

Casambi (blue-tooth control of each fixture),

MacAdam steps: 3

Casambi (blue-tooth control of each fixture),

UGR:19

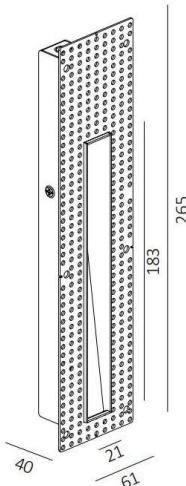

25\*245mm  
5-25mm

Instructions  
p.2

# Plaster-in wall step light

## Instruction leaflet

**GLOW**  
**TECH**  
LIGHTING

**EN** Read this instruction carefully before commencing installation and keep it for future reference.

Always switch off the mains before installation or maintenance.



Keep the product far from heat sources and in a Well-ventilated area.

The installation or maintenance should be carried out by a qualified electrician.


**⚠** The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person .



02

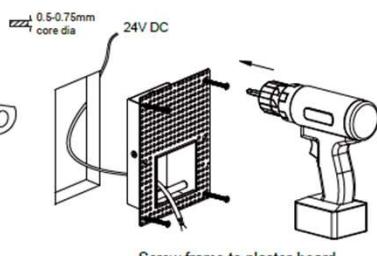


03




04

Plaster-skim the frame




05

connect to remote driver



06

Install packer



- Constant Voltage DC fittings must be wired in parallel.
- SET DRIVER TO CORRECT OUTPUT
- Use flex from driver to fitting